




Designed & Engineered in the UK

For working safely under pressure

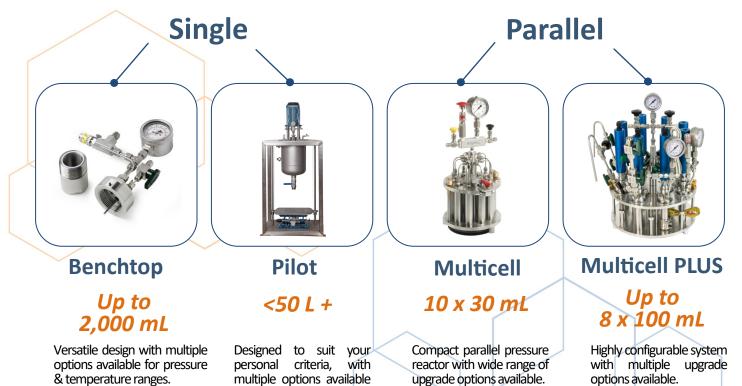

for

Configuration

As standard, our vessels can be built to your desired specification.

pressure and

temperature range.



Common options

for

- Stainless steel 316 material
- 50 or 180 bar max working pressure
- 250 °C max temperature
- Heating using hotplate stirrer with DrySyn adapter
- Pressure relief valve, gauge & thermowell
- Standard Swagelok fittings
- Magnetic agitation

Upgrade options

- Exotic metals eg. Hastelloy or inconel
- Pressure to your requirement; 500 bar +
- Temperature to your requirement
- Upgrade to dedicated heater; 800 °C+
- Sampling & charging
- Liners: PTFE, glass
- Cooling
- Hosing for connection to gas lines
- Overhead stirring
- Burst disc & associated pipework

enquiries@asynt.com +44 (0)1638 781709 www.Asynt.com

ASYNT2 Pressure Reactor Overview

Applications

Ideal for use in:

- Hydrogenations & other gas phase reactions
- Hydrothermal synthesis
- Homogeneous and heterogeneous catalysis
- Corrosion testing

The Asynt Service

By chemists, for chemists

- Your reactor system will be designed around your application/budget
- We offer solutions from simple reactor vessels to elaborate reactor systems

- Catalyst Screening, reaction optimisation & materials testing
- Supercritical studies

•

- After design & manufacture, we offer installation, servicing & testing spares
- Every reactor is fully tested & certified
- All relevant safety standards conformed to

www.asynt.com/products/high-pressure-reactors

Find out more about the Asynt pressure reactor range via our YouTube channel!

Ask us about PressureSyn

You hold the key!

Features unique safety ley & locking clamp designed by the chemists and engineers at the University of Nottingham.



Customise, don't compromise Contact us today to discuss your requirements!