


## SW22 Shaking Water Bath

JULABO Shaking Water Baths provide numerous state-of-the-art features for common day-to-day laboratory tasks. For example: sloped edges keep water in the stainless steel bath tank even when bath lid is open.

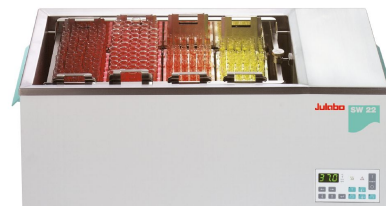

### Your advantages

- Working temperature range from +20 to +99.9 °C
- User-friendly operation via keypad
- Bright LED-Display
- Splash-proof design
- Power switch integrated in keypad (patented)
- High temperature stability of  $\pm 0.2$  °C or  $\pm 0.02$  °C
- Dry-running protection with audible and optical alarm
- Warning and cut-off protection for high/low temperature
- Adjustable shaking frequencies from 20 to 200 RPM's in SW models
- Convenient bath drains
- Removable bottom plate and shaking insert
- Lift-up bath cover (optional)
- Wide selection of accessories for temperature control of samples
- All wetted parts are made of stainless steel or high grade plastics

### Technical data

Available voltage versions		Bath	
Order No.	9 550 322	Bath tank	Stainless steel
Available voltage versions:		Bath cover	accessory
9 550 322.02	115V/60Hz (Nema N5-15 Plug)	Usable bath opening cm (W x L / D)	50 x 30 / 18
9 550 322.03	230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F)		
9 550 322.04	230V/50-60Hz (UK Plug Type BS1363A)		
9 550 322.05	230V/50-60Hz (CH Plug Type SEV 1011)		
Other		Electronics	
Classification	Classification I (NFL)	Temperature control	PID1
IP Code	IP 21	Temperature display	LED
		Temperature setting	Keypad
Waterbath		Dimensions and volumes	
Dimension with bathcover cm (W x L x H)	70 x 35 x 43	Usable immersion depth cm	18
Shaking frequency / adjustable Shaking frequency rpm	20 ... 200	Weight kg	19.7
Shaking stroke / adjustable shaking stroke mm	15	Dimensions cm (W x L x H)	70 x 35 x 26
		Filling volume l	8 ... 20
Temperature values			
Setting the resolution of the temperature display °C	0.1		
Working temperature range °C	+20 ... +99.9		
Temperature stability °C	$\pm 0.2$		
Ambient temperature °C	5 ... 40		

### Performance values

#### 115V/60Hz (Nema N5-15 Plug)

115V/60Hz	
Heating capacity kW	1

#### 230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F)

230V/50Hz		230V/60Hz	
Heating capacity kW	2	Heating capacity kW	2

#### 230V/50-60Hz (UK Plug Type BS1363A)

230V/50Hz		230V/60Hz	
Heating capacity kW	2	Heating capacity kW	2

#### 230V/50-60Hz (CH Plug Type SEV 1011)

230V/50Hz		230V/60Hz	
Heating capacity kW	2	Heating capacity kW	2

### All Benefits



**Precise**  
PID Temperature control with set control parameters, temperature stability  $\pm 0.02 \dots \pm 0.2$  °C



**Automatic control of operating time**  
Electronic countdown-timer function for timer-programmed unit shut-down, standby mode after programmed time expires



**JULABO. Quality.**  
Highest standards of quality for a long product life.



**Green technology.**  
Development consistently applied environmentally friendly materials and technologies.



**Satisfied customers.**  
11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



**100% Checked.**  
100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.



**Quick start.**  
Individual JULABO consultation and comprehensive manuals at your disposal.



**Services 24/7.**  
Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at [www.julabo.com](http://www.julabo.com).